


PRODUCTS >> TURBIDITY BARRIERS >> TYPES >> II

Printer Friendly

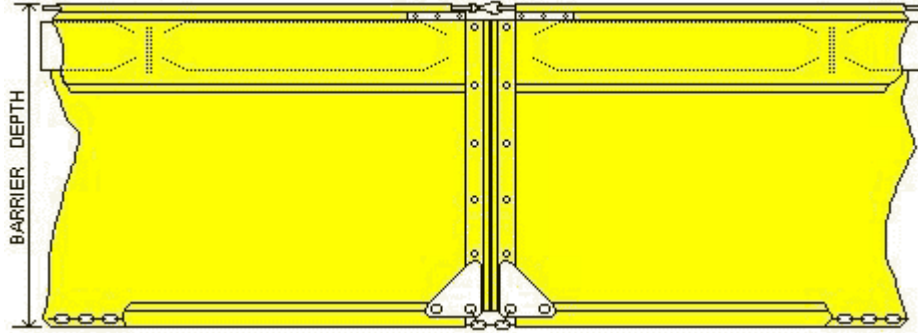

Type II is the work horse of the TOUGH GUY® line. It has a top load cable and special stress plates for reinforcing the corners and is designed to handle more severe conditions. It is recommended for lakes, streams, intercoastal and tidal areas where current velocities up to five feet per second are expected.

The anchorage and installation must be designed to meet the site conditions. Contact Aer-Flo Canvas Products, Inc. or a qualified engineer for assistance when extraordinary site conditions are encountered. Barrier sections are connected by rope lacing or nylon ties which must be furnished by others.